
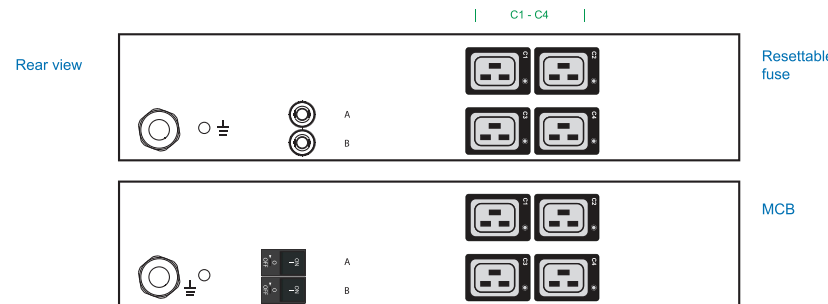


1-Phase Basic PDU specification drawing

230V 13A / 16A / 20A / 32A PDU : UK x 8 + C13 x 8 + C19 x 4

unit : mm

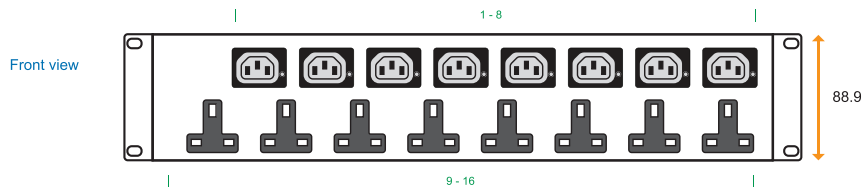

Circuit Protection	Code
Fuse	F
MCB	CR



IEC 60309 Inlet

32A model :	Circuit Protection
H8UK90/8C13/4C19-32A/ F _EN/3B-1	Resettable Fuse x 2
H8UK90/8C13/4C19-32A/ CR _EN/3B-1	1-pole MCB x 2



Open end

20A model :	Circuit Protection
H8UK90/8C13/4C19-20A/ F _OE/3B-1	Resettable Fuse x 1
H8UK90/8C13/4C19-20A/ CR _OE/3B-1	1-pole MCB x 1



IEC 60309 Inlet

16A model :	Circuit Protection
H8UK90/8C13/4C19-16A/ F _EN/3B-1	Resettable Fuse x 1
H8UK90/8C13/4C19-16A/ CR _EN/3B-1	1-pole MCB x 1



IEC320 C20

16A model :	Circuit Protection
H8UK90/8C13/4C19-16A/ F _C20/3B-1	Resettable Fuse x 1
H8UK90/8C13/4C19-16A/ CR _C20/3B-1	1-pole MCB x 1



BS1363 (fused)

13A model :	Circuit Protection
H8UK90/8C13/4C19-13A/ F _BS/3B-1	Resettable Fuse x 1
H8UK90/8C13/4C19-13A/ CR _BS/3B-1	1-pole MCB x 1

Chassis Color	Code
Black	1
White	2
Red	3
Blue	4
Green	5
Orange	6
Yellow	7
Purple	8

Standard color: Black

Input Rating : 32Amp, 230V
Cordset : 3 meter 4.0mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 2
Circuit A : Output 16A max., C13 #1-4 + UK #9-12 + C19 #C1-C2
Circuit B : Output 16A max., C13 #5-8 + UK #13-16 + C19 #C3-C4
Weight : -

Input Rating : 20Amp, 230V
Cordset : 3 meter 2.5mm sq. H05V V-F cordset
Protection : 20A resettable fuse or 20A hydraulic MCB x 1
Circuit : Output 20A max., C13 #1-8 + UK #9-16 + C19 #C1-C4
Weight : -

Input Rating : 16Amp, 230V
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 1
Circuit : Output 16A max., C13 #1-8 + UK #9-16 + C19 #C1-C4
Weight : -

Input Rating : 16Amp, 230V
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 1
Circuit : Output 16A max., C13 #1-8 + UK #9-16 + C19 #C1-C4
Weight : -

Input Rating : 13Amp, 230V
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 13A resettable fuse or 13A hydraulic MCB x 1
Circuit : Output 13A max., C13 #1-8 + UK #9-16 + C19 #C1-C4
Weight : -

Operating Temperature : -5 to 60 °C
Storage Temperature : -25 to 65 °C
Operating Altitude : 0 to 2,000 m
Storage Altitude : 0 to 15,000 m
Humidity : 8 to 95% RH, non-condensing

EMC Compliance : CE / EMC
Safety Compliance : CE / LVD & UKCA
Tested to EN 62368-1:2014 / A11:2017 standard
Tested to EN 60730-1:2016 / A1:2019 standard
Environment Compliance : RoHS3 & REACH

AUSTIN HUGHES Design. Manufacturing. Global Services.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Copyright 2023 Austin Hughes Electronics Ltd. All rights reserved.

Product Dimension : 442 (W) x 120 (D) x 88.9 (H) mm
Packing Dimension : 525 (W) x 230 (D) x 130 (H) mm