


# 1-Phase basic PDU specification drawing

## 230V 10A / 13A / 16A / 20A / 32A PDU : UK x 12

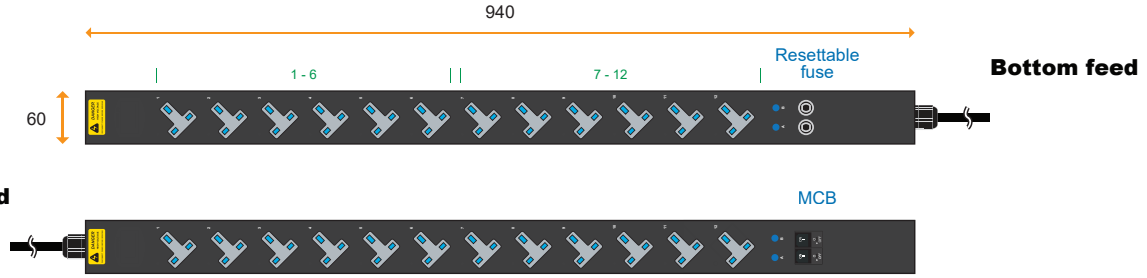


Circuit Protection	Code
Fuse	<b>F</b>
MCB	<b>CR</b>

PDU Feed	Code
Bottom	<b>B</b>
Top	<b>T</b>

Chassis Color	Code
Black	<b>1</b>
White	<b>2</b>
Red	<b>3</b>
Blue	<b>4</b>
Green	<b>5</b>
Orange	<b>6</b>
Yellow	<b>7</b>
Purple	<b>8</b>

Standard color: Black



32A model :	Circuit Protection
V12UK135-32A-F_EN/3B-1	Resettable Fuse x 2
V12UK135-32A-CR_EN/3T-1	1-pole MCB x 2

20A model :	Circuit Protection
V12UK135-20A-F_OE/3B-1	Resettable Fuse x 1
V12UK135-20A-CR_OE/3T-1	1-pole MCB x 1

16A model :	Circuit Protection
V12UK135-16A-F_EN/3B-1	Resettable Fuse x 1
V12UK135-16A-CR_EN/3T-1	1-pole MCB x 1

16A model :	Circuit Protection
V12UK135-16A-F_C20/3B-1	Resettable Fuse x 1
V12UK135-16A-CR_C20/3T-1	1-pole MCB x 1

13A model :	Circuit Protection
V12UK135-13A-F_BS/3B-1	Resettable Fuse x 0
V12UK135-13A-CR_BS/3T-1	1-pole MCB x 1

10A model :	Circuit Protection
V12UK135-10A-F_C14/3B-1	Resettable Fuse x 1
V12UK135-10A-CR_C14/3T-1	1-pole MCB x 1

Input Rating : 32Amp, 230V  
Cordset : 3 meter 4.0mm sq. H05V V-F cordset  
Protection : 16A resettable fuse or 16A hydraulic MCB x 2  
Circuit A : Output 16A max., UK #1-6  
Circuit B : Output 16A max., UK #7-12  
Weight : Net 3.4 Kg / Gross 3.9 Kg

Input Rating : 20Amp, 230V  
Cordset : 3 meter 2.5mm sq. H05V V-F cordset  
Protection : 20A resettable fuse or 20A hydraulic MCB x 1  
Circuit : Output 20A max., UK #1-12  
Weight : Net 3.4 Kg / Gross 3.9 Kg

Input Rating : 16Amp, 230V  
Cordset : 3 meter 1.5mm sq. H05V V-F cordset  
Protection : 16A resettable fuse or 16A hydraulic MCB x 1  
Circuit : Output 16A max., UK #1-12  
Weight : Net 3.0 Kg / Gross 3.5 Kg

Input Rating : 16Amp, 230V  
Cordset : 3 meter 1.5mm sq. H05V V-F cordset  
Protection : 16A resettable fuse or 16A hydraulic MCB x 1  
Circuit : Output 16A max., UK #1-12  
Weight : Net 3.0 Kg / Gross 3.5 Kg

Input Rating : 13Amp, 230V  
Cordset : 3 meter 1.5mm sq. H05V V-F cordset  
Protection : 13A glass fuse in BS1363 plug or 13A hydraulic MCB x 1  
Circuit : Output 13A max., UK #1-12  
Weight : Net 2.7 Kg / Gross 3.2 Kg

Input Rating : 10Amp, 230V  
Cordset : 3 meter 1.5mm sq. H05V V-F cordset  
Protection : 10A resettable fuse or 10A hydraulic MCB x 1  
Circuit : Output 10A max., UK #1-12  
Weight : Net 2.7 Kg / Gross 3.2 Kg

Operating Temperature : -5 to 60 °C  
Storage Temperature : -25 to 65 °C  
Operating Altitude : 0 to 2,000 m  
Storage Altitude : 0 to 15,000 m  
Humidity : 8 to 95% RH, non-condensing

EMC Compliance : CE / EMC  
Safety Compliance : CE / LVD & UKCA  
Tested to EN 62368-1:2014 / A11:2017 standard  
Tested to EN 60730-1:2016 / A1:2019 standard  
Environment Compliance : RoHS3 & REACH



The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

**With resettable fuse**  
Product Dimension : 60 (W) x 55 (D) x 940 (H) mm  
Packing dimension ( for 2 PDUs ) : 270 (W) x 110 (D) x 1400 (H) mm

**With hydraulic MCB**  
Product Dimension : 60 (W) x 70 (D) x 940 (H) mm  
Packing dimension ( for 2 PDUs ) : 270 (W) x 110 (D) x 1400 (H) mm