


# 1-Phase basic specification drawing

230V 16A / 20A / 32A PDU : UK x 4 + C13 x 16 + C19 x 4

unit : mm

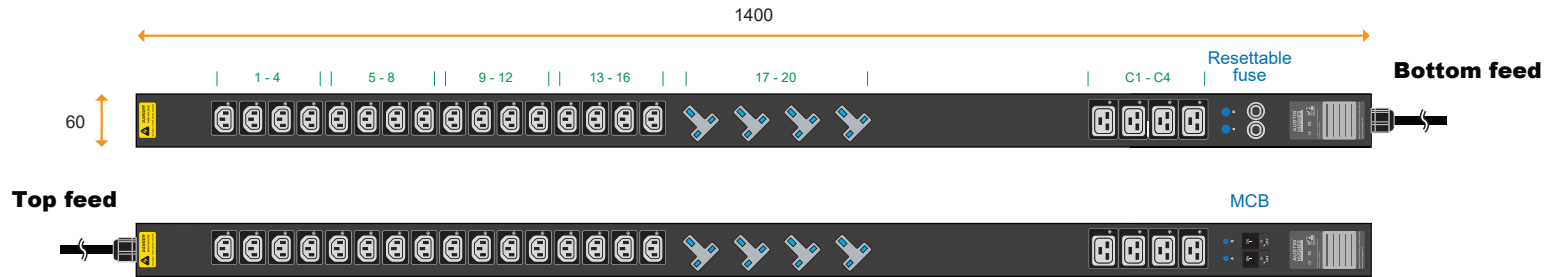

Circuit Protection	Code
Fuse	<b>F</b>
MCB	<b>CR</b>



IEC 60309 Inlet

32A model :	Circuit Protection
V4UK135-16C13-4C19-32A- <b>F_EN/3B-1</b>	Resettable Fuse x 2
V4UK135-16C13-4C19-32A- <b>CR_EN/3T-1</b>	1-pole MCB x 2

Input Rating : 32Amp, 230V  
Cordset : 3 meter 4.0mm sq. H05V V-F cordset  
Protection : 16A resettable fuse or 16A hydraulic MCB x 2  
Circuit A : Output 16A max., C13 #1-8 + UK #17-18 + C19 #C1-C2  
Circuit B : Output 16A max., C13 #9-16 + UK #19-20 + C19 #C3-C4  
Weight : Net - Kg / Gross - Kg

PDU Feed	Code
Bottom	<b>B</b>
Top	<b>T</b>



Open end

20A model :	Circuit Protection
V4UK135-16C13-4C19-20A- <b>F_OE/3B-1</b>	Resettable Fuse x 1
V4UK135-16C13-4C19-20A- <b>CR_OE/3T-1</b>	1-pole MCB x 1

Input Rating : 20Amp, 230V  
Cordset : 3 meter 2.5mm sq. H05V V-F cordset  
Protection : 20A resettable fuse or 20A hydraulic MCB x 1  
Circuit : Output 20A max., C13 #1-16 + UK #17-20 + C19 #C1-C4  
Weight : Net - Kg / Gross - Kg

Chassis Color	Code
Black	<b>1</b>
White	<b>2</b>
Red	<b>3</b>
Blue	<b>4</b>
Green	<b>5</b>
Orange	<b>6</b>
Yellow	<b>7</b>
Purple	<b>8</b>



IEC 60309 Inlet

16A model :	Circuit Protection
V4UK135-16C13-4C19-16A- <b>F_EN/3B-1</b>	Resettable Fuse x 1
V4UK135-16C13-4C19-16A- <b>CR_EN/3T-1</b>	1-pole MCB x 1

Input Rating : 16Amp, 230V  
Cordset : 3 meter 1.5mm sq. H05V V-F cordset  
Protection : 16A resettable fuse or 16A hydraulic MCB x 1  
Circuit : Output 16A max., C13 #1-16 + UK #17-20 + C19 #C1-C4  
Weight : Net - Kg / Gross - Kg



IEC320 C20

16A model :	Circuit Protection
V4UK135-16C13-4C19-16A- <b>F_C20/3B-1</b>	Resettable Fuse x 1
V4UK135-16C13-4C19-16A- <b>CR_C20/3T-1</b>	1-pole MCB x 1

Input Rating : 16Amp, 230V  
Cordset : 3 meter 1.5mm sq. H05V V-F cordset  
Protection : 16A resettable fuse or 16A hydraulic MCB x 1  
Circuit : Output 16A max., C13 #1-16 + UK #17-20 + C19 #C1-C4  
Weight : Net - Kg / Gross - Kg

Operating Temperature : -5 to 60 °C  
Storage Temperature : -25 to 65 °C  
Operating Altitude : 0 to 2,000 m  
Storage Altitude : 0 to 15,000 m  
Humidity : 8 to 95% RH, non-condensing

EMC Compliance : CE / EMC  
Safety Compliance : Tested to EN 62368-1:2014 / A11:2017 standard  
Tested to EN 60730-1:2016 / A1:2019 standard  
Environment Compliance : RoHS3 & REACH