


# FBXLCUC11

---

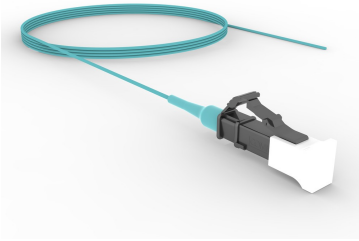

OM4 LC/UPC to Unconnectorized, Fiber Pigtail, 0.9 mm SBJ

## Product Classification

<b>Regional Availability</b>	Asia   Australia/New Zealand   Europe   Latin America   Middle East /Africa   North America
<b>Portfolio</b>	CommScope®
<b>Product Type</b>	Fiber pigtail, unjacketed
<b>Product Brand</b>	SYSTIMAX InstaPATCH® 360
<b>Ordering Note</b>	Minimum length may vary based on cable configuration

## General Specifications


<b>Color, boot A</b>	Aqua
<b>Color, connector A</b>	Black
<b>Interface, Connector A</b>	LC/UPC
<b>Jacket Color</b>	Aqua
<b>Total Fibers, quantity</b>	1
<b>Transmission Standards</b>	TIA/EIA-568-C.3

## Dimensions

<b>Cable Assembly Length Range (m)</b>	1 – 61
<b>Cable Assembly Length Range (ft)</b>	2 – 200

## Ordering Tree

# FBXLCUC11

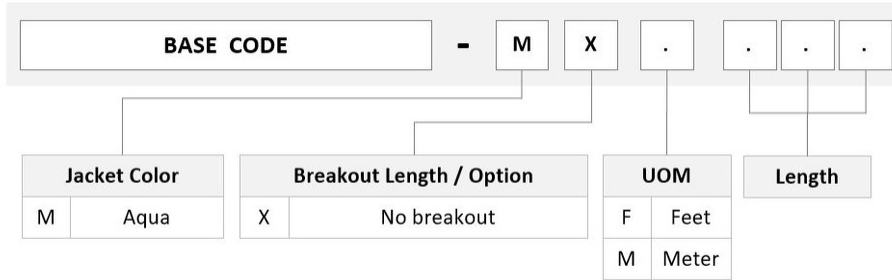

## Mechanical Specifications

**Cable Retention Strength, maximum** 2.00 lb @ 90 ° | 5.00 lb @ 0 °

## Optical Specifications

**Fiber Mode** Multimode

**Fiber Type** OM4, LazrSPEED®

## Environmental Specifications

**Operating Temperature** -10 °C to +60 °C (+14 °F to +140 °F)

**Environmental Space** Low Smoke Zero Halogen (LSZH)

## Packaging and Weights

**Packaging quantity** 2

## Regulatory Compliance/Certifications

### Agency

CHINA-ROHS

ISO 9001:2015

REACH-SVHC

ROHS

### Classification

Below maximum concentration value

Designed, manufactured and/or distributed under this quality management system

Compliant as per SVHC revision on [www.commscope.com/ProductCompliance](http://www.commscope.com/ProductCompliance)

Compliant



## Included Products

- 760010603 N-001-RF-5K-F09AQ – LazrSPEED® 0.9 mm Low Smoke Zero Halogen Reinforced Buffered Fiber Cable
- 860657284 – LC/UPC Connector, Multimode, Aqua

