


FBXSCUC11

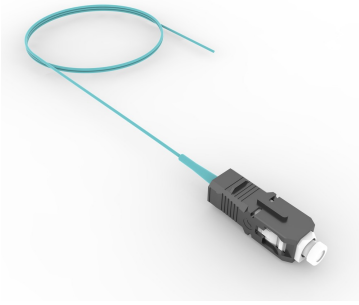

LazrSPEED® 550 SC/UPC to Unconnectorized, Fiber Pigtail, 0.9 mm SBJ

Product Classification

Regional Availability	Asia Australia/New Zealand China Europe India Latin America Middle East/Africa North America
Portfolio	CommScope®
Product Type	Fiber pigtail, unjacketed
Product Brand	SYSTIMAX InstaPATCH® 360
Ordering Note	Minimum length may vary based on cable configuration

General Specifications


Color, boot A	Aqua
Color, connector A	Black
Interface, Connector A	SC/UPC
Jacket Color	Aqua
Total Fibers, quantity	1

Dimensions

Cable Assembly Length Range (m)	1 – 61
Cable Assembly Length Range (ft)	2 – 200

Ordering Tree

FBXSCUC11

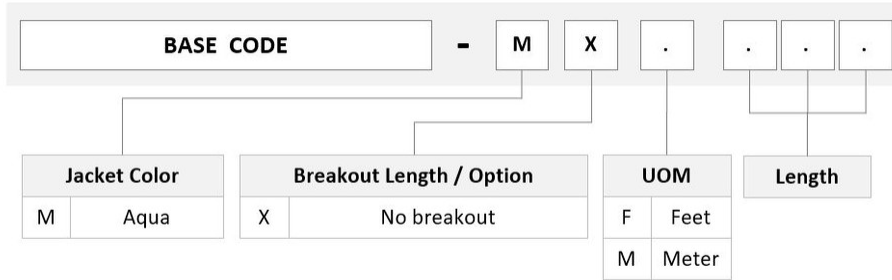

Mechanical Specifications

Cable Retention Strength, maximum 2.00 lb @ 90 ° | 5.00 lb @ 0 °

Optical Specifications

Fiber Mode Multimode

Fiber Type OM4, LazrSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Low Smoke Zero Halogen (LSZH)

Packaging and Weights

Packaging quantity 2

Regulatory Compliance/Certifications

Agency

CHINA-ROHS

ISO 9001:2015

REACH-SVHC

ROHS

Classification

Below maximum concentration value

Designed, manufactured and/or distributed under this quality management system

Compliant as per SVHC revision on www.commscope.com/ProductCompliance

Compliant



Included Products

- 760010603 N-001-RF-5K-F09AQ - LazrSPEED® 0.9 mm Low Smoke Zero Halogen Reinforced Buffered Fiber Cable
- 860652871 - SC/PC Connector, Multimode, Aqua

