



1-Phase Basic PDU specification drawing

230V 13A / 16A / 20A / 32A PDU : UK x 8 + C13 x 8 + C19 x 2

unit : mm

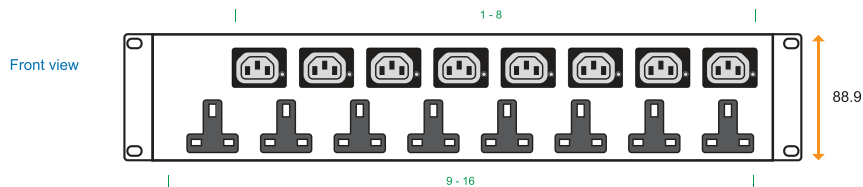

Rear view

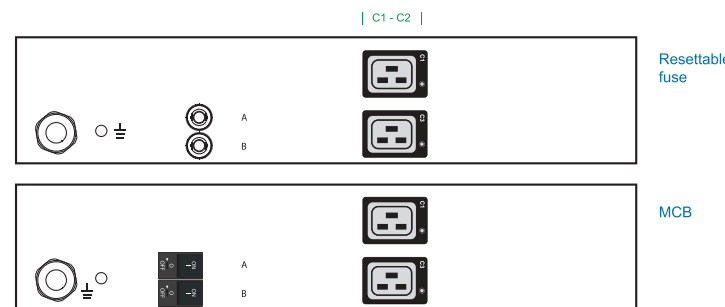

Circuit Protection	Code
Fuse	F
MCB	CR



IEC 60309 Inlet



Open end



IEC 60309 Inlet



IEC320 C20



BS1363 (fused)

Chassis Color	Code
Black	1
White	2
Red	3
Blue	4
Green	5
Orange	6
Yellow	7
Purple	8

Standard color: Black

Model	Circuit Protection
32A model :	Circuit Protection
H8UK90/8C13/2C19-32A/ F _EN/3B-1	Resettable Fuse x 2
H8UK90/8C13/2C19-32A/ CR _EN/3B-1	1-pole MCB x 2
20A model :	Circuit Protection
H8UK90/8C13/2C19-20A/ F _OE/3B-1	Resettable Fuse x 1
H8UK90/8C13/2C19-20A/ CR _OE/3B-1	1-pole MCB x 1
16A model :	Circuit Protection
H8UK90/8C13/2C19-16A/ F _EN/3B-1	Resettable Fuse x 1
H8UK90/8C13/2C19-16A/ CR _EN/3B-1	1-pole MCB x 1
16A model :	Circuit Protection
H8UK90/8C13/2C19-16A/ F _C20/3B-1	Resettable Fuse x 1
H8UK90/8C13/2C19-16A/ CR _C20/3B-1	1-pole MCB x 1
13A model :	Circuit Protection
H8UK90/8C13/2C19-13A/ F _BS/3B-1	Resettable Fuse x 1
H8UK90/8C13/2C19-13A/ CR _BS/3B-1	1-pole MCB x 1

Input Rating : 32Amp, 230V
Cordset : 3 meter 4.0mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 2
Circuit A : Output 16A max., C13 #1-4 + UK #9-12 + C19 #C1
Circuit B : Output 16A max., C13 #5-8 + UK #13-16 + C19 #C2
Weight : -

Input Rating : 20Amp, 230V
Cordset : 3 meter 2.5mm sq. H05V V-F cordset
Protection : 20A resettable fuse or 20A hydraulic MCB x 1
Circuit : Output 20A max., C13 #1-8 + UK #9-16 + C19 #C1-C2
Weight : -

Input Rating : 16Amp, 230V
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 1
Circuit : Output 16A max., C13 #1-8 + UK #9-16 + C19 #C1-C2
Weight : -

Input Rating : 16Amp, 230V
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 1
Circuit : Output 16A max., C13 #1-8 + UK #9-16 + C19 #C1-C2
Weight : -

Input Rating : 13Amp, 230V
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 13A resettable fuse or 13A hydraulic MCB x 1
Circuit : Output 13A max., C13 #1-8 + UK #9-16 + C19 #C1-C2
Weight : -

Operating Temperature : -5 to 60 °C
Storage Temperature : -25 to 65 °C
Operating Altitude : 0 to 2,000 m
Storage Altitude : 0 to 15,000 m
Humidity : 8 to 95% RH, non-condensing

EMC Compliance : CE / EMC
Safety Compliance : CE / LVD & UKCA
Tested to EN 62368-1:2014 / A11:2017 standard
Tested to EN 60730-1:2016 / A1:2019 standard
Environment Compliance : RoHS3 & REACH